

RUNWAY




SPECIFICATIONS

Construction	LOOP
Product	Runway
Pile Fiber Composition	100% Olefin
Yarn Type	BCF
Dye Method	Solution Dyed
Pile Weight	800 g/m ²
Number of Tufts	232260/m ²
Tufting Gauge	1/12"
Primary Backing	Non-Woven
Backing Structures	Recova -PU Cushion EcoShield , 100% Recycled Vinyl StableShield -100% Vinyl
Tile Size	50 cm x 50 cm / 1m x 1m (optional)
Pile Height	3.5 mm
Total Tile Height	7.5 mm
Pile Treatment	INVISTA Anti-Soil treatment Anti-Microbial (Optional)
Recommended Installation	Brick or Quarter Turn: Tile Brick, Basket, Half Basket, Herringbone: Plank

Performance Specifications

Wear Classification	Medium Contract	
VOC Emission	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux: US	ASTM E648-08	Class II
Reaction to Fire: EU	EN ISO 9239-1:2002	Dfl - s1
Static Propensity	ISO 6356	0.2 KV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04m ² /KW
Impact Sound Insulation	ISO 140-8	23dB
Sound Absorption Level	EN ISO 11654	w: 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4

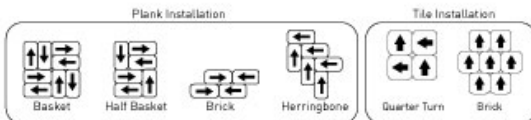

Corporate Headquarter:
2304 Swiss Jumeira Lake Towers
Dubai-UAE

Manufacturing: [30th September 2014]
Standard Carpets Ind. LLC.
Post box No. 490014, Plot No. 5315801
Dubai Industrial City, Dubai UAE

Sample Request:
Standard Carpets Ind. LLC.
Plot 94, Industrial Area 1,
Sharjah UAE
Phone:+971 6 532 3777
Fax:+971 6 533 3637
Email: carpets@emirates.net.ae

Made in UAE by
Standard Carpets.
The largest manufacturer of tufted
carpets and the only manufacturer
of carpet tiles in the Emirates.

Standard Carpets are manufactured
under the environmental quality
system certified and complying with
ISO 18001 by an accredited
certification body.